


# مشخصات کلی و ابعاد دقیق فلومتر

## LZM Series Acrylic Flow Meter

### LZM-G Series



YUYAO KINGTAI INSTRUMENT CO.,LTD

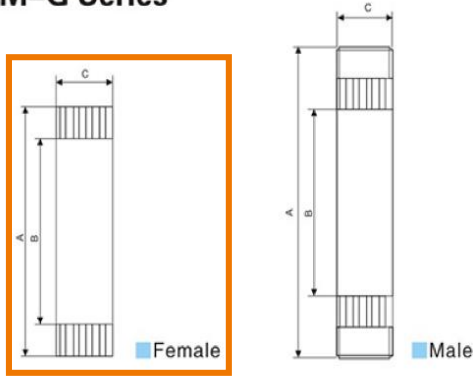

### Technical Parameters of LZM-G Series Tube Type Flow Meter

Model	Range			Screw Thread	Accuracy	Size ( mm )		
	GPM (Liquid)	LPM (Liquid)	Nm <sup>3</sup> /h(Gas)			A	B	C
LZM-10G		2.5-25LPH		(M)1/2"BSP (M)1/2"NPT	± 4%	187	130	22
		5-45LPH						
		6-60LPH						
		10-100LPH						
		16-160LPH						
LZM-15GD		4-40LPH	0.3-3	(F) 1/2" BSP		210	180	32
		10-100LPH						
LZM-15G	0.1-1	0.5-4	0.8-8 1-10 1.6-16 2.5-25 4-40	(F) 1/2" BSP		210	180	32
LZM-15GF	0.2-2	1-7						
	0.5-5	1.8-18						
	1.5-9	400-2000LPH						
LZM-20G	1-10	4-36	6-60	(F) 3/4" BSP	278	236	45	
LZM-20GF		100-1000LPH						
LZM-25G LZM-25GF	1-10	4-36	6-60 10-100 ★15-140 16-160 25-250 35-350 80-400	(F) 1" BSP	265	235	51	
	1-15	5-60						
	2-20	10-70						
	5-30	20-110						
	5-40	20-150						
	5-45	20-170						
	20-60	80-220						

### The material of LZM-G series Flow Meter

جنس اجزای تشکیل دهنده ی فلومتر

Fitting	Float	O-ring
1.ABS 2.PP √3.PVC 4.Brass 5.Brass chromeplate 6.SS	√ 1.SS 2.Agata ball 3.PTFE	√ 1.Silicon rubber 2.Fluorin rubber 3.Butyl

Note:Mark with√, the material of the Flow Meter is the General Configuration

Note: For buyer's convenience,we design two constructions for this series of flowmeter,one is circular,and the other one is quadrate,their measure range is same,LZM-G Circular tube type flowmeter LZM-GF Quadrate tube type flowmeter