


مشخصات کلی و ابعاد دقیق فلومتر

LZM Series Acrylic Flow Meter

LZM-G Series



YUYAO KINGTAI INSTRUMENT CO.,LTD

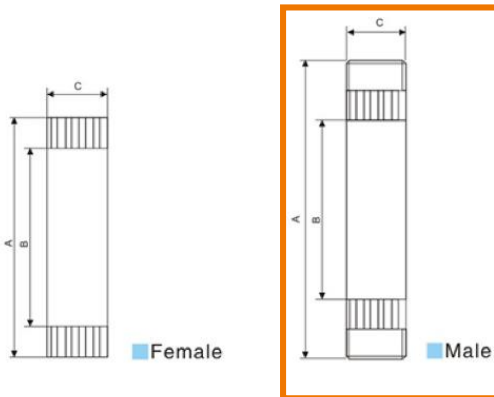

Technical Parameters of LZM-G Series Tube Type Flow Meter

Model	Range			Screw Thread	Accuracy	Size (mm)		
	GPM (Liquid)	LPM (Liquid)	Nm ³ /h(Gas)			A	B	C
LZM-40G LZM-40GF	1-10	4-36	6-60 10-100 ★ 15-140 16-160 25-250 35-350 80-400	(M) 1 1/2" BSP	±4%	306	235	51
	1-15	5-60						
	2-20	10-70						
	5-30	20-110						
	5-40	20-150						
	5-45	20-170						
LZM-40GB	20-60	80-220						
	4-40	15-150		(F) 1 1/2" BSP	±4%	302	230	68
	6-60	20-240						
	8-80	50-300						
10-100	50-350							
LZM-50G LZM-50GF	20-80	80-300	100-500 120-600 300-850 400-1200 500-1400	(F/M) 2" BSP	±4%	380 (M)	270	75
	20-100	80-360						
	40-120	150-450						
	50-150	190-560						
	60-200	220-750						
LZM-75GF	120-300	450-1100		(F) 3" BSP		392	298	110X110

The material of LZM-G series Flow Meter

Fitting	Float	O-ring
1.ABS	√ 1.SS	√ 1.Silicon rubber
2.PP	2.Agata ball	2.Fluorin rubber
√ 3.PVC	3.PTFE	3.Butyl
4.Brass		
5.Brass chromeplate		
6.SS		

جنس اجزای تشکیل دهنده ی فلومتر

Note: Mark with √ , the material of the Flow Meter is the General Configuration

Note: For buyer's convenience, we design two constructions for this series of flowmeter, one is circular, and the other one is quadrate, their measure range is same, LZM-G Circular tube type flowmeter LZM-GF Quadrate tube type flowmeter