


مشخصات کلی و ابعاد دقیق فلومتر

LZM Series Acrylic Flow Meter

LZM-G Series



YUYAO KINGTAI INSTRUMENT CO.,LTD

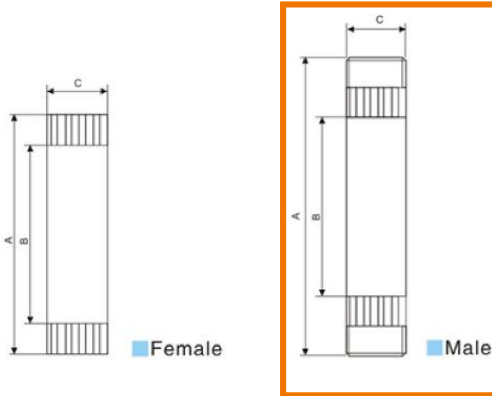

Technical Parameters of LZM-G Series Tube Type Flow Meter

| Model | Range | | | Screw Thread | Accuracy | Size (mm) | | |
|---------------------|--------------|--------------|---|------------------|----------|-------------|-----|---------|
| | GPM (Liquid) | LPM (Liquid) | Nm ³ /h(Gas) | | | A | B | C |
| LZM-40G LZM-40GF | 1-10 | 4-36 | 6-60 10-100 ★ 15-140 16-160 25-250 35-350 80-400 | (M) 1 1/2" BSP | ±4% | 306 | 235 | 51 |
| | 1-15 | 5-60 | | | | | | |
| | 2-20 | 10-70 | | | | | | |
| | 5-30 | 20-110 | | | | | | |
| | 5-40 | 20-150 | | | | | | |
| | 5-45 | 20-170 | | | | | | |
| 20-60 | 80-220 | | | | | | | |
| LZM-40GB | 4-40 | 15-150 | | (F) 1 1/2" BSP | ±4% | 302 | 230 | 68 |
| | 6-60 | 20-240 | | | | | | |
| | 8-80 | 50-300 | | | | | | |
| | 10-100 | 50-350 | | | | | | |
| LZM-50G LZM-50GF | 20-80 | 80-300 | 100-500 120-600 300-850 400-1200 500-1400 | (F/M) 2" BSP | ±4% | 380 (M) | 270 | 75 |
| | 20-100 | 80-360 | | | | | | |
| | 40-120 | 150-450 | | | | | | |
| | 50-150 | 190-560 | | | | | | |
| | 60-200 | 220-750 | | | | | | |
| LZM-75GF | 120-300 | 450-1100 | | (F) 3" BSP | ±4% | 392 | 298 | 110X110 |

The material of LZM-G series Flow Meter

| Fitting | Float | O-ring |
|---------------------|--------------|--------------------|
| 1.ABS | √ 1.SS | √ 1.Silicon rubber |
| 2.PP | 2.Agata ball | 2.Fluorin rubber |
| √ 3.PVC | 3.PTFE | 3.Butyl |
| 4.Brass | | |
| 5.Brass chromeplate | | |
| 6.SS | | |

جنس اجزای تشکیل دهنده ی فلومتر

Note: Mark with √ , the material of the Flow Meter is the General Configuration

Note: For buyer's convenience, we design two constructions for this series of flowmeter, one is circular, and the other one is quadrate, their measure range is same, LZM-G Circular tube type flowmeter LZM-GF Quadrate tube flowmeter